

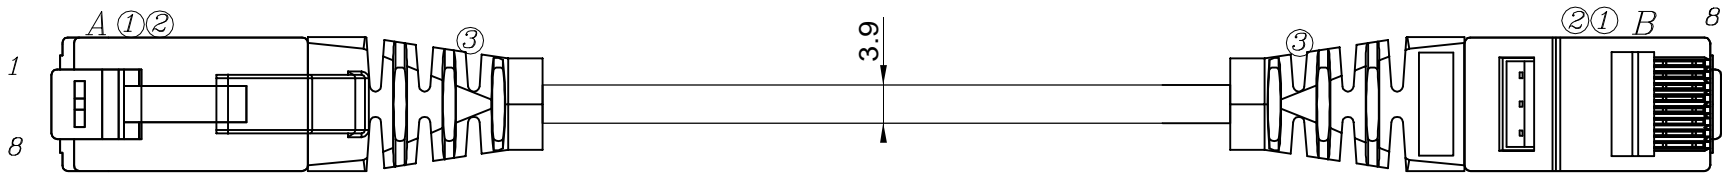


INFORMATIONAL
PURPOSE ONLY

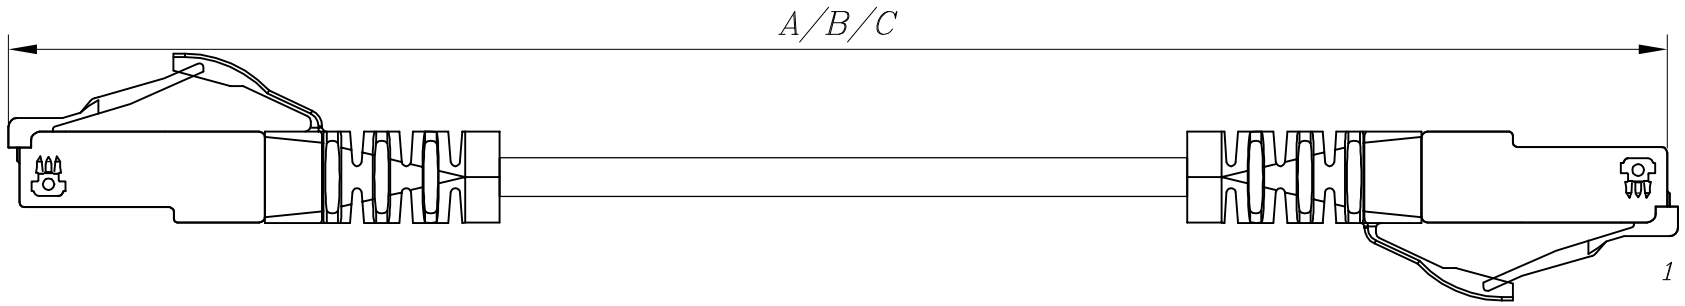

ARRANGE METHOD:



RoHS

MATERIAL

PLUG : PC, UL94V-2.
 PLUG CONTACT : PHOSPHOR BRONZE, 50U" GOLD PLATING.
 JACKET : PVC.
 CONDUCTOR : 28AWG.
 IDC PLASTIC : PC,UL94V-0.

Scale		1:1			All Copy Rights Reserved				
3rd Angle Projection					nFlexon LLC				
Unit		mm			Title				
Date		2017/03/17			Category 6A Small Diameter Patch Cord				
Tolerance					PC6AUNXX00XX				
~20	~50	~150	150~	ANGLE					
±0.2	±0.4	±0.5	±1.5	±2°					